

MBA Series Filter Cartridges

ABSOLUTE RATED MELT BLOWN FILTERS

THE
STRAINRITE
Companies | World Class
Filtration

MBA Series Filter Cartridges— Absolute Rated Melt Blown Performance

MBA Series melt blown depth filters deliver 99.9% efficiency at the stated micron for the most demanding applications. By utilizing ultra fine fibers and controlled thermal bonding, the MBA series retains captured contaminant even at higher differential pressures.

Superior Design & Construction


The cartridges feature a proprietary graded pore structure with polypropylene end caps and industry-leading gasket/O-ring options to suit diverse chemical environments. Available in nine standard lengths with a 2.5" outer diameter, these cartridges integrate seamlessly into existing filtration systems. Multi-zone melt blown depth filter with a graded pore structure for maximum dirt holding capacity

- > Absolute retention ratings from 0.3 to 100 microns
- > Non-shedding cartridge, free of binders
- > Variety of thermally bonded end-caps
- > Graded pore construction for high dirt-holding capacity



MBA FLOW RATE

Typical Flow Rate Clean Water at Ambient Temperature
(Per 10" Cartridge)

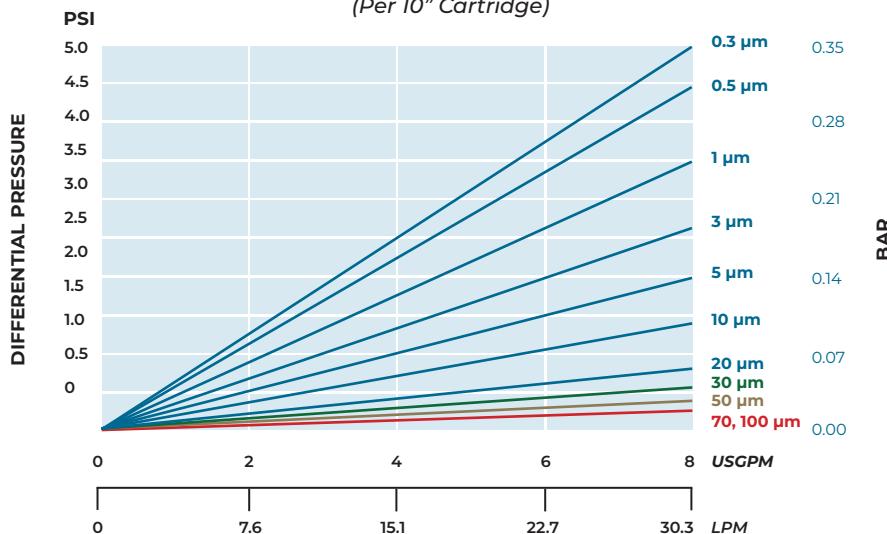

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise

Regulatory and Quality
Commitments



V1_00_2026

MBA Series Filter Cartridges

ABSOLUTE RATED MELT BLOWN FILTERS

- Binder and Surfactant Free
- Manufactured in a Certified ISO 9001 Quality System
- USP Class VI: Meets USP Class VI Biological Test for Plastics (full statement)
- FDA Listed Materials: All material comply with FDA Title 21 CFR Sections 174.5, 177.1520, and 177.2600
- NSF 61: Certified to NSF/ANSI STD 61 for materials requirements only—Component
- European Directive for Direct Food Contact: EU Regulation No. 1935/2004 and EU Regulation 10/2011
- PWIS/LABS: Filter media tested to VDMA 24364:2018-05 standards



SPECIFICATIONS

MAXIMUM OPERATING DIFFERENTIAL PRESSURE:	
150 psid (10.3 bar) @ 68°F (20°C) 90 psid (6.2 bar) @ 150°F (66°C) 35 psid (2.4 bar) @ 176°F (80°C)	
MAXIMUM OPERATING TEMPERATURE	
176°F (80°C)	
RECOMMENDED CHANGE-OUT PRESSURE	
35 psid (2.4 bar)	
TOXICITY	
Cartridge materials meet USP Class VI and CFR 21 for food and beverage contact	
RETENTION RATING	
0.3, 0.5, 1, 3, 5, 10, 20, 30, 50, 70, 100µm	
END CAPS	CARTRIDGE SEALS
Polypropylene	Buna-N EPDM Santoprene Silicone Teflon Encap. Viton (O-Rings only) Viton
CAGE / CORE	SEALING
Polypropylene	Thermal Bond
FILTER MEDIA	
Meltblown Polypropylene	
INSIDE DIAMETER	
1.0"	
OUTSIDE DIAMETER	
2.5" for uncut ends and 2.63" for end-cap	

Order Options

CARTRIDGE	RATINGS	LENGTHS	END CAP	O-RING
MBA Absolute-Rated Melt Blown	0.3 = 0.3 µm 0.5 = 0.5 µm 1 = 1 µm 3 = 3 µm 5 = 5 µm 10 = 10 µm 20 = 20 µm 30 = 30 µm 50 = 50 µm 70 = 70 µm 100 = 100 µm	5" 9.75" 10" 19.5" 20" 29.25" 30" 39" 40"	C1 = Double Open Ends C2 = 213/Recessed Cup C3 = 222/Flat C4 = Single Open End/Flat C5 = 222/Recessed Cup C6 = 226/Flat C7 = 226/Fin C8 = 222/Fin N = None (Cut Ends)	B = Buna-N E = EPDM N = None S = Silicone T = Teflon Encapsulated Viton (O-Rings only) V = Viton

*Inquire on alternative options



Order Option Example

MBA → 0.5 → 30 → N → S → MBA0.5-30NN
Capsule Rating Length End Cap O-Ring

VL00_2026